
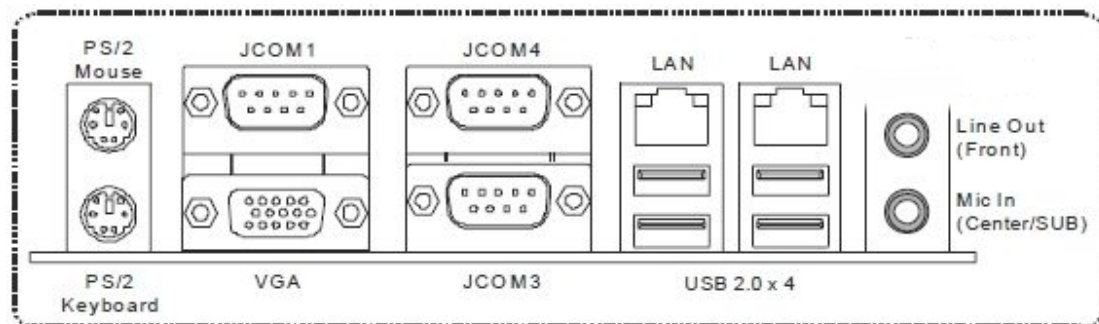


SYS76866VGGA-525-NM 简易说明书

1、System Board Layout

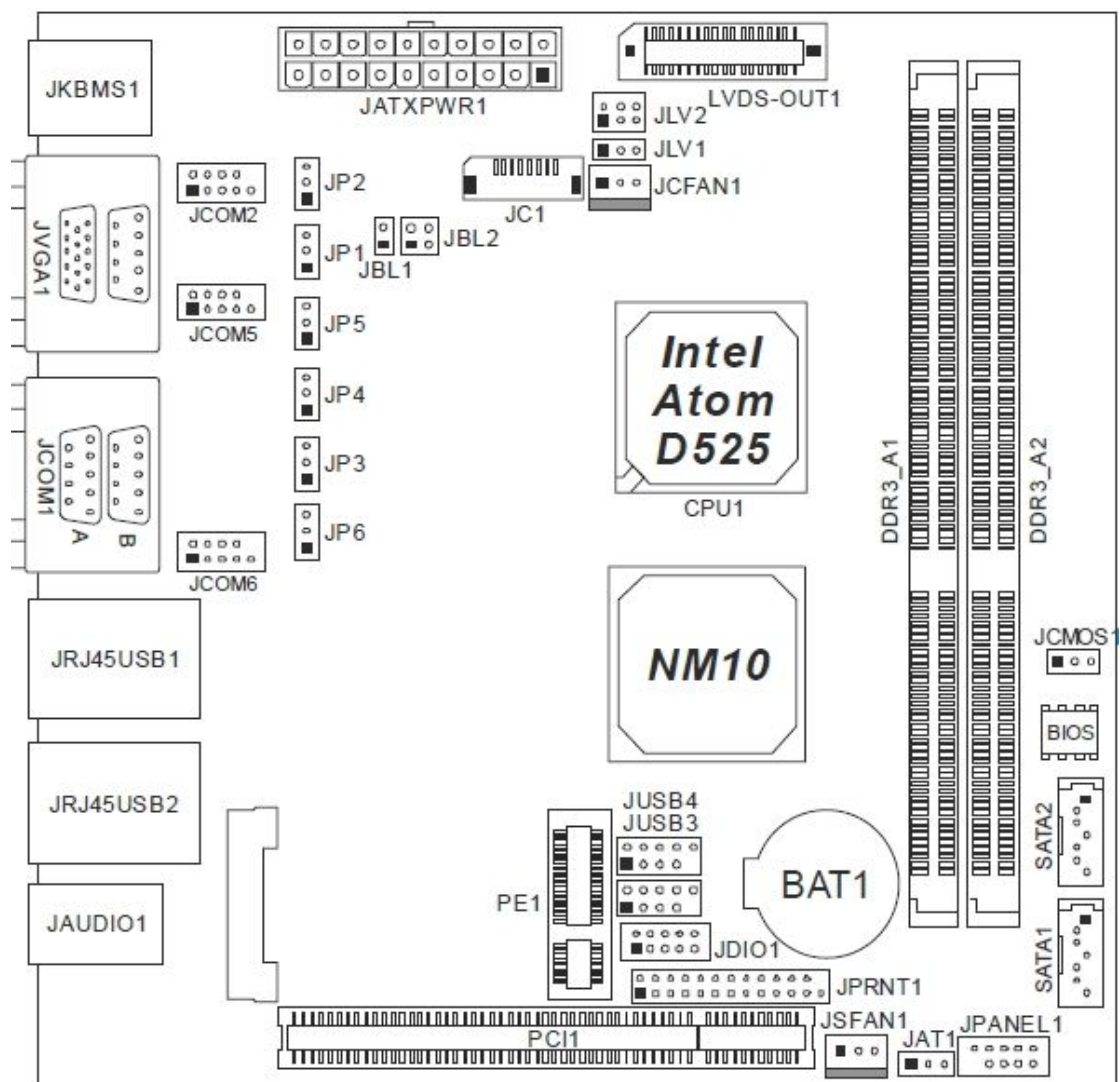


2、Connectors:

Label	Connectors
LVDS_OUT1	LVDS Headers
JC1	LCD Backlight Inverter Connector
JUSB3~JUSB4	USB 2.0 Headers
SATA1~SATA2	Serial ATA Header
PE1	Mini PCI-E Slot
JDIO1	Digital I/O Connector
JSFAN1	System Fan Header
JPRNT1	Printer port Connector
JATXPWR1	Standard ATX power Input
JKBMS1	Keyboard/Mouse Connector
JPANEL1	Front Panel Connector
JCOM1~COM6	COM port Header


3、Jumper List

Jumper	Function
JP1~JP6	COM1~COM6 Voltage Switch Header
JBL1	LCD Backlight Power ON/OFF Header
JBL2	LCD Backlight Brightness Adjust Header
JLV1	LCD Backlight Inverter Power Select Header
JLV2	LCD Power Select Header
JAT1	AT/ATX Power Switch Header
JCMOS1	Clear CMOS Header

4、Front Panel Connector setting :


Pin	Define	Function	Pin	Define	Function	 JPANEL1
1	Key	N/A	2	Power LED+	Power LED	
3	HD LED+	HDD LED	4	Power LED+		
5	HD LED-		6	Power LED-		
7	Reset GND	Reset Buttion	8	Power	Power Button	
9	Reset		10	Power GND		

5、Jumper Setting (JCMOS1、JAT1):

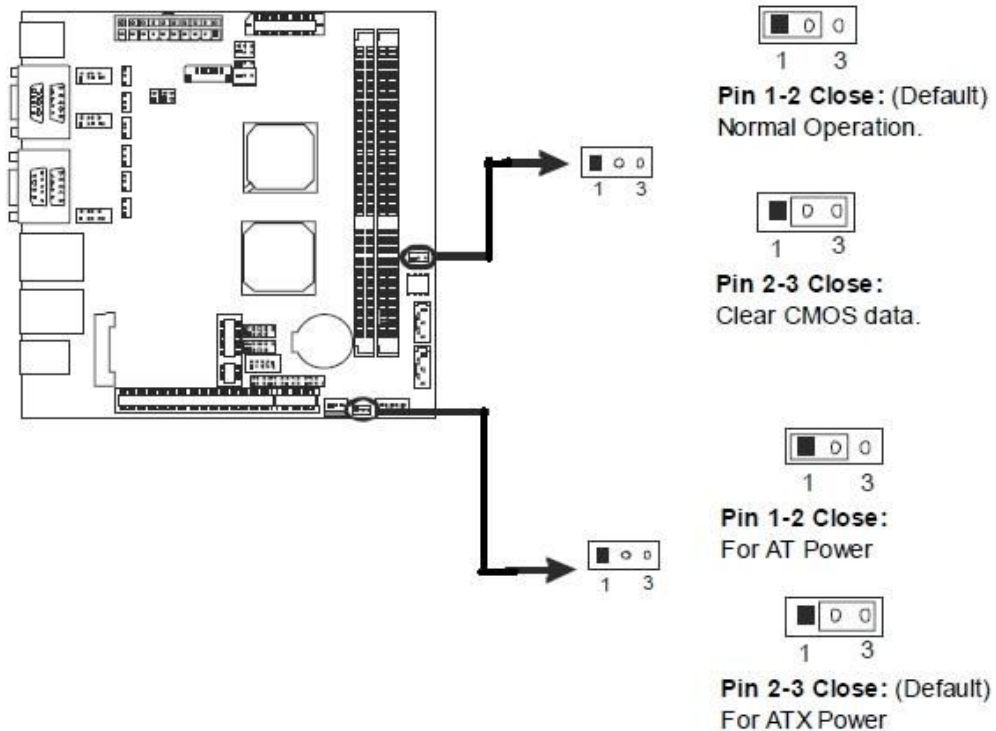

JLV2: LCD Power Select Header *

This header allows you to select LCD Power.

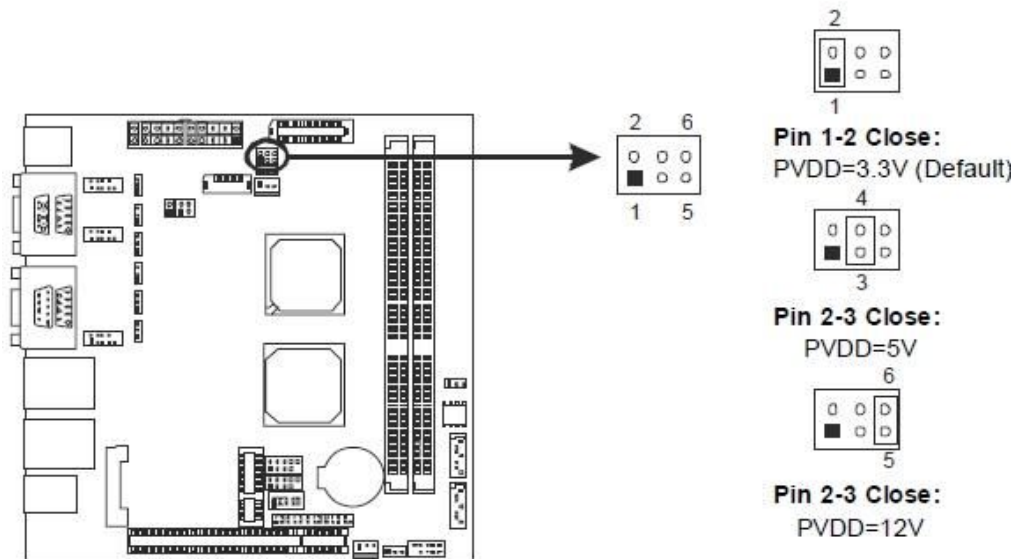

Checklist:

- **SYS76866VGGA-525-NM Mainboard*1pcs**
- **Utility CD for SYS76866VGGA-525-NM *1pcs**
- **Installation Guide*1pcs**
- **SATA Cable *1pcs;**
- **COM cable and Print cable*3pcs**