

Features


- High efficiency 15" fanless Panel PC
- Front panel: IP65
- Onboard 4GB DDR4 2133MHz
- 2.5" Shockproof hard disk rack, mSATA Disk(optional), 2 x M.2
- Double WIFI positions · expanded by mini PCIe wireless module
- DC 12~28V wide voltage supply
- Supports VESA and Wallmount
- Supports Embedded operating system
- Supports flexible customization services




Specifications

Processor	CPU	i5-6200U
	Frequency	2.3G/2C/4T
	Power consumption	15W
Memory	Technology/Capacity	Onboard 4GB DDR4 2133MHz
Storage	SATA	1 x 2.5" Hard Disk (anti-seismic hard disk rack)
	mSATA	1 x mSATA (Full-size · optional)
	M.2	1 x M.2 (M Key, 2242, PCIe 4X)
Display	Display	Intel HD Graphics
Screen	LCD Size/Display Type	15" XGA LCD
	Resolution	1024×768
	Display Color	16.7M
	Viewing Angle	85/85/85/85 (left/right/up/down)
	Luminance	350cd/m ²
	Contrast Ratio	1500 : 1
	Touch Type	Five-wire resistive touch screen (Taiwan brand)
Rear I/O	Power Input	1 x DC 12~28V IN
	POWER SW	1 x POWER SW
	Display Ports	1 x VGA
	COM Ports	4 x COM (COM1 supports RS232/8bit GPIO · COM2 supports RS232/422/485 · COM3~4 support RS232/485)
	LAN Ports	2 x Gigabit LAN
	USB Ports	4 x USB3.0
	Audio	1 x L-OUT
	WIFI	2 x WIFI (optional) · expanded by Mini PCIe wireless module
Adapter 60W	Input	AC 100~240V/1.5A 50/60Hz
	Output	DC 12V/5A
Expansion	Mini PCIe	1 x Mini PCIe (Full-size. share w/mSATA)
Dimensions	W:387mm D:72mm H:296mm	
Environment	Operation Temp & Humidity	-10~60°C/10~90%, Non-condensing
	Storage Temp & Humidity	-20~70°C/10~90%, Non-condensing

■ Dimensions

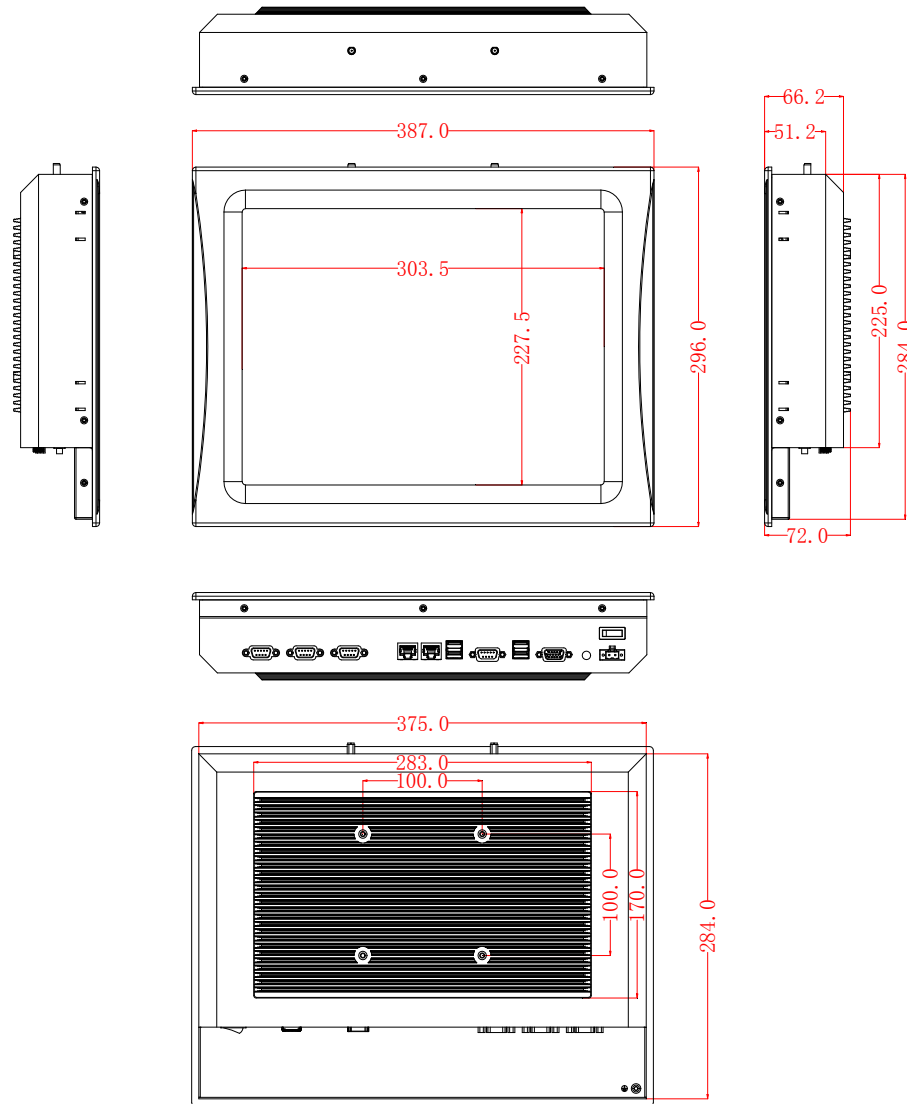

■ I/O View

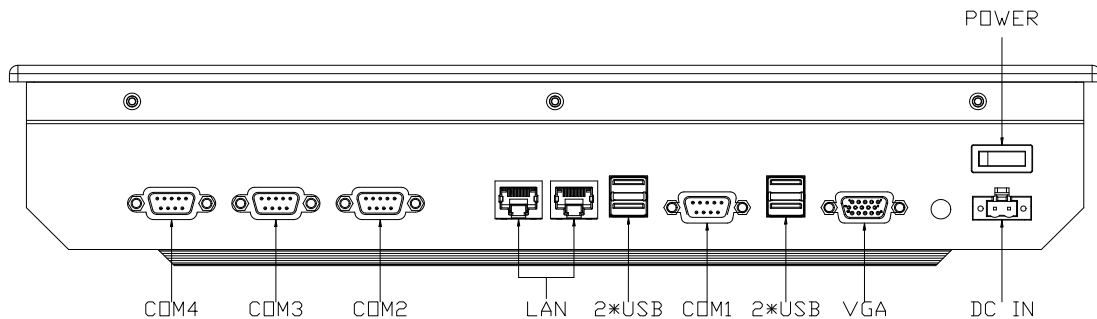

■ Ordering Information

Part No.	Model	Description
226315055	PAD6315-6200U	w/i5-6200U/4COM/2LAN/4USB/DC12~28V/1024*768/Resistive touch screen/DC Adapter/onboard 4GB DRAM