

Features

Intel Bay Trail-D 15" Embedded Fanless Panel PC with PCI

- Embedded Low consumption Fanless Panel PC
- IP65-compliant front panel protection
- Rich IO interface: 2COM/2GbE/4USB//HDMI/VGA
- Supports 2.5" Shockproof hard disk rack, mSATA Disk(optional)
- Supports WIFI function(optional)
- Supports VESA and Wallmount
- Supports Embedded operating system,
- Supports flexible customization services
- Supports 2 x PCI




Specifications


Processor	CPU	J1900 (Bay Trail-D)
	Chipset	2.0G/4C/4T
	Consumption	10W
Memory	Frequency / Capacity	1 x DDR3L 1333MHz, Optional capacity, up to 8GB
Storage	SATA	Optional 1 x 2.5" Hard Disk (Optional capacity)
	mSATA	Optional 1 x mSATA (Full-size, Optional capacity)
Display	Display	Intel HD Graphics
Screen	LCD Size/Display Type	15" XGA LCD
	Resolution	1024x768
	Display Color	16.7M
	Viewing Angle	85/85/85/85
	Brightness	350cd/c m ²
	Contrast	1500 : 1
Rear I/O	Touch Screen	Five-wire resistive touch screen
	Power Input	1 x DC 12V IN
	PWR SW	1 x POWER SW
	Display Ports	1 x VGA ; 1 x HDMI
	COM Ports	2 x COM(RS232/422/485)
	LAN Ports	2 x Gigabit LAN (Intel i211-AT + Realtek RTL8111G)
	USB Ports	3 x USB2.0 ; 1 x USB3.0
	KB/ MS	1 x PS/2 KB/MS
	Audio	1 x Line-Out/MIC
Adapter 60W	WIFI	Support 1 x Mini PCIe WIFI Device
	Input	AC 100~240V/1.5A 50/60Hz
Expansion	Output	DC 12V/5A
	Mini PCIe	1 x Mini PCIe (Half-size)
Dimensions	PCI	2 x PCI
	W:392mm D:95.6mm H:300mm	
Environment	Operation Temp & Humidity	-10~60°C/10~90%, Non-condensing
	Storage Temp & Humidity	-20~70°C/10~90%, Non-condensing

Dimensions

Intel Bay Trail-D 15" Embedded Fanless Panel PC with PCI

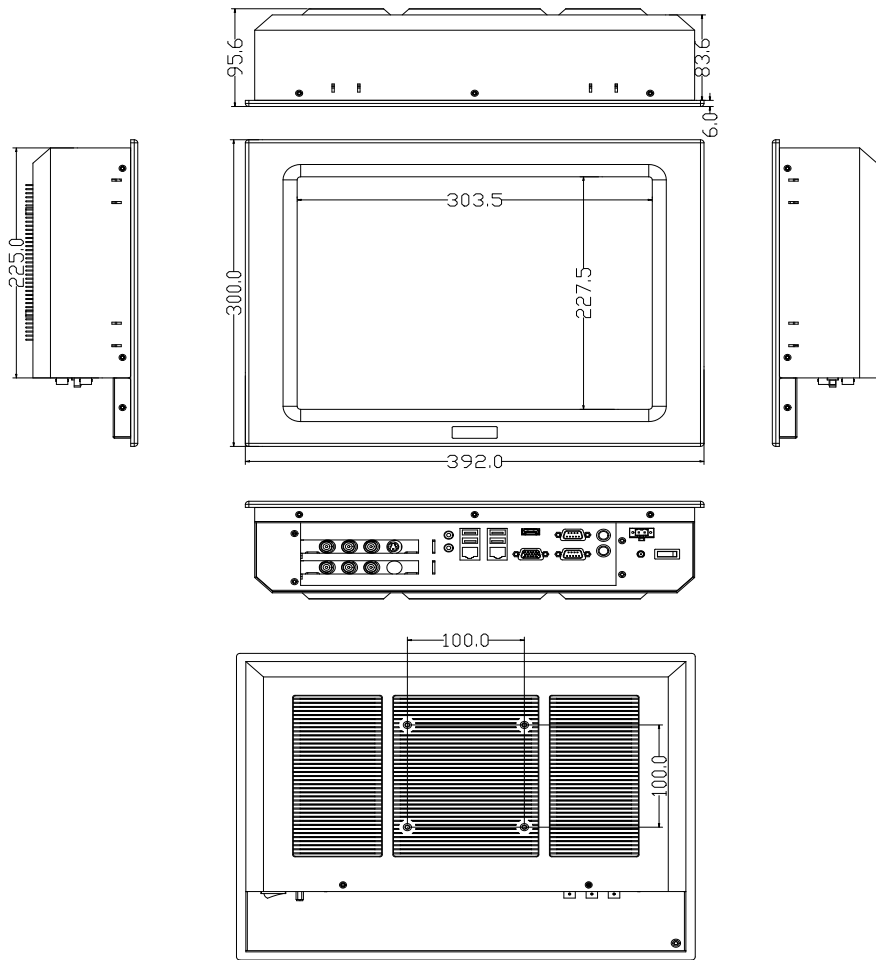

I/O Appearance

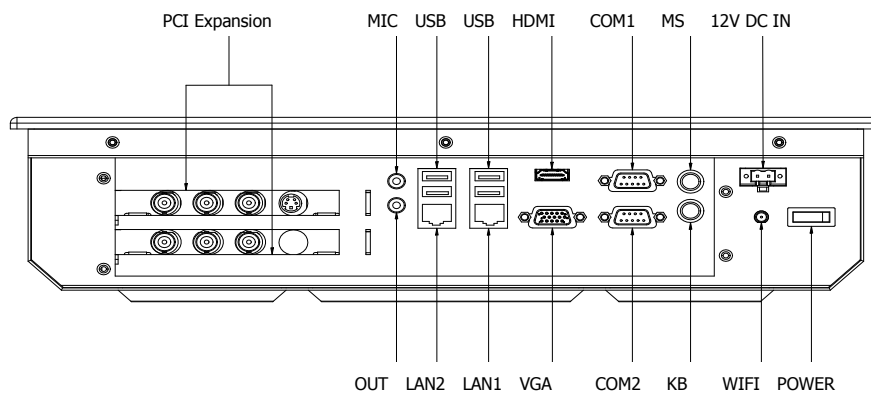

Ordering Information

P/N	Model	Description
226315038	PAD6315-BT2P	Intel Bay Trail-D J1900 CPU 15" Embedded Fanless Panel PC, w/60W Adapter/2COM/2GbE/4USB/2PCI