

Features


- Embedded Low consumption Fanless Panel PC
- 19 inch rackmount
- IP65-compliant front panel protection
- Rich IO interface: 6COM/2GbE/4USB//HDMI/VGA
- Supports 2.5" Shockproof hard disk rack, mSATA Disk(optional)
- Supports WIFI function(optional)
- Supports VESA and Wallmount
- Supports Embedded operating system
- Supports flexible customization services
- Special design for Environmental Protection field




Specifications

Processor	CPU	J1900 (Bay Trail-D)
	Chipset	2.0G/4C/4T
	Consumption	10W
Memory	Frequency / Capacity	1 x DDR3L 1600MHz; Optional capacity, up to 8GB
	Storage	
Storage	SATA	1 x 2.5' Hard Disk (optional)
	mSATA	1 x mSATA (Full-size, optional)
Display	Display	Intel® HD Graphics
Screen	LCD Size/Display Type	15" XGA LCD
	Resolution	1024×768
	Display Color	16.7M
	Viewing Angle	85/85/85/85
	Brightness	350cd/m ²
	Contrast	1500 : 1
	Touch Screen	Five-wire resistive touch screen
Front I/O	PWR SW	1 x φ12 round & flat head POWER SW (w/LED)
	USB	1 x USB2.0 (waterproof)
Rear I/O	Power Input	1 x DC 12V IN
	PWR SW	1 x POWER SW
	Display Ports	1 x VGA : 1 x HDMI
	COM Ports	6 x COM (supports RS232/422/485)
	LAN Ports	2 x Gigabit LAN
	USB Ports	3 x USB2.0; 1 x USB3.0 (internal reserved a USB2.0 watchdog position)
	KB/ MS	1 x KB/MS
	Audio	1 x Line-Out/MIC
	WIFI	Supports 1 x Mini PCIe WIFI Device
Adapter 60W	Input	AC 100~240V/1.5A 50/60Hz
	Output	DC 12V/5A
Expansion	Mini PCIe	1 x Mini PCIe (Half-size)
Dimension	W:482.6mm D:310mm H:73mm	
Environment	Operation Temp & Humidity	-10~60°C/10~90% , Non-condensing
	Storage Temp & Humidity	-20~70°C/10~90% , Non-condensing

Dimensions

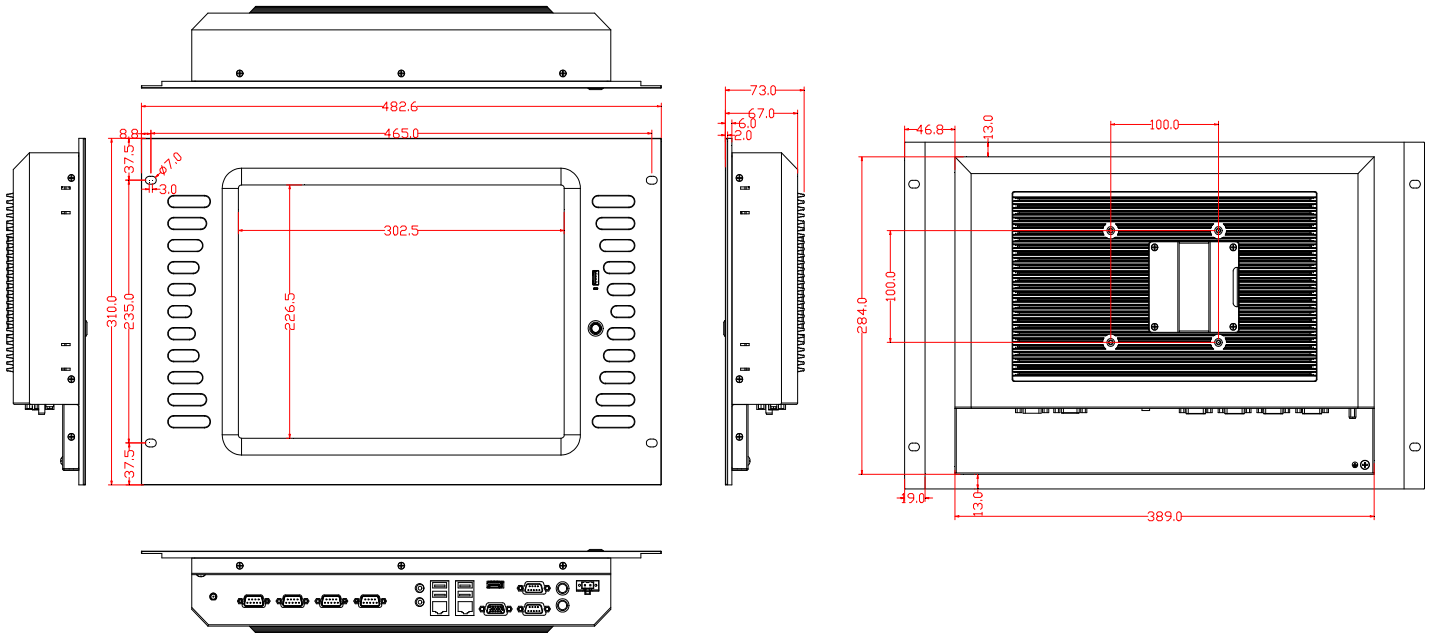

I/O View

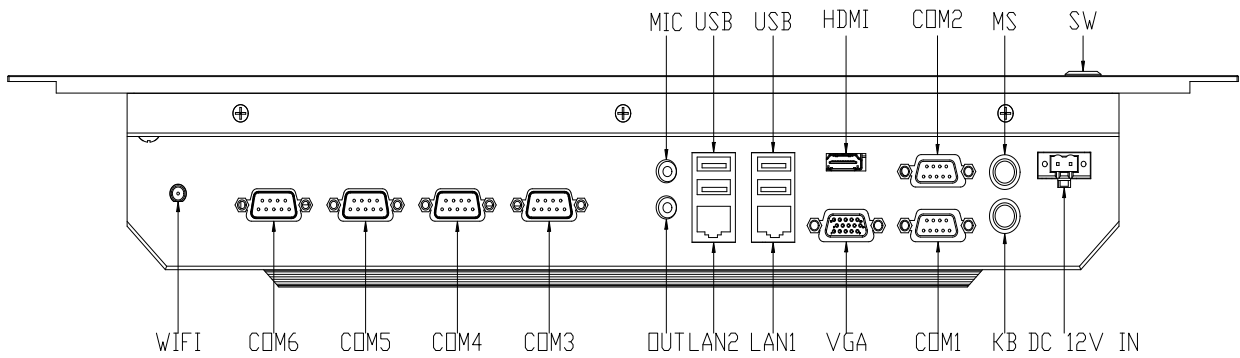

Ordering Information

P/N	Models	Descriptions
226315050	PAD6315-BTHB	J1900/6COM/4USB/1024*768 / 19" rockmount