
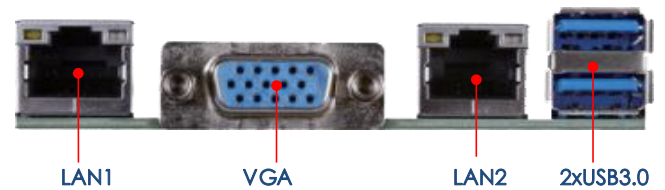


# SYS8F388VGGA-Pico

2.5" Pico-ITX Intel Apollo w/VGA/LVDS/Mini-DP/2GbE/2USB3.0/2USB2.0 /Mini\_PClie/1COM/M.2 Slot/DC 12V Input

## Specification

Processor	CPU	N3350: DC/1.1GHz/ Burst Frequency 2.4GHz
	TDP	6W
	BIOS	AMI UEFI
DRAM	Technology	DDR3-L 1866MHz
	Capacity	Up to 8GB
	Socket	1 x 204-Pin SO-DIMM
Display	Graphics	Intel HD Graphics
	Graphics Memory	Share System memory up to 1.7GB SDRAM
	DP	1 (Mini-Displayport)
	HDMI	N/A
	LVDS	1
	VGA	1
Multiple Display	3 Independent displays	
LAN	2 x Intel GbE LAN (i211-AT)	
Audio	ALC262 w/ Line-out/Mic	
Watchdog	1~255 Watchdog Times	
Storage	SATA	1 x SATA3.0
	mSATA	N/A
	M.2	1 x M.2 (B.Key 2242, PCIe 1X /USB2.0/SATA3.0)
I/O	COM	1 x RS232/422/485
	LPT	N/A
	USB	2 x USB3.0 + 2 x USB2.0
	GPIO	4-In, 4-Out
	SMbus	Yes
	TPM	N/A
Expansion Slot	SIM	N/A
	Mini PCIe	1 (Full-Size)
Power	DC-In 12V	
Form Factor	100mm x 72mm (2.5")	
Environment	Operation Temp & Humidity	0~60°C/10~90%, non-condensing
	Storage Temp & Humidity	-40~85°C/10~90%, non-condensing
Certification	EMC	CE / FCC
O.S	Windows 10 IoT Enterprise 64bit Fedora 25 / Ubuntu 16.04	

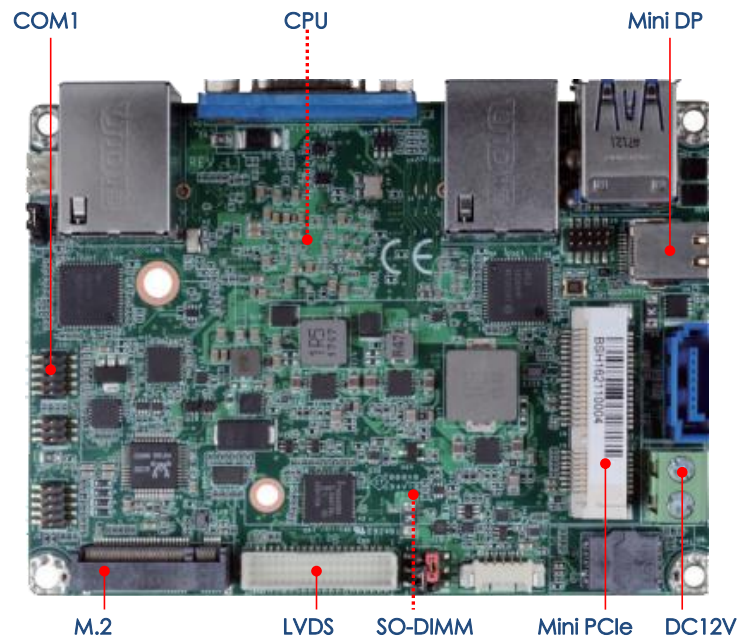

## Ordering Info

Model	SYS8F388VGGA-Pico
Spec.	Intel PICO-ITX Apollo w/VGA/Mini DP/LVDS/2GbE/2USB3.0/2USB2.0/Mini_PClie/1COM/M.2 Slot/DC12V