

■ Features


- 2U Rackmount industrial chassis support Mini-ITX board
- 3 x PCI expansion slots
- 1 x 3.5" & 1 x 5.25" CD/DVD drive
- SGCC material, compact and solid
- Streamlined air convection design, good cooling capacity
- Adjustable I/O shield, can match all Mini-ITX boards
- Front-accessible 2 x USB interfaces · easy to operate
- Lockable front door prevents unauthorized access




■ Specifications

Color	Black	
Material	SECC1.2	
Device	1 x 5.25" and 1 x 3.5" Disk Drive Bay	
Cooling	8025 FAN	
Power Supply	250W 1U ATX Power Supply	
Front Panel I/O	1 × Power LED 1 × Hard Disk LED 1 × Power Switch 1 × Reset Switch 2 × USB2.0 Type-A	
Rear Panel I/O	1 × 1U Power Supply Switch 1 x AC 100~240V/1.5A 50/60Hz Input 3 x PCI expansion slots	
Dimensions (W x D x H)	482 x 461x 88mm	
Environment	Operating Temp& Humidity:	0 ~ 60°C/10 ~ 85 % , Non-condensing
	Storage Temp & Humidity	-20~70°C/10~95%, Non-condensing

Dimensions

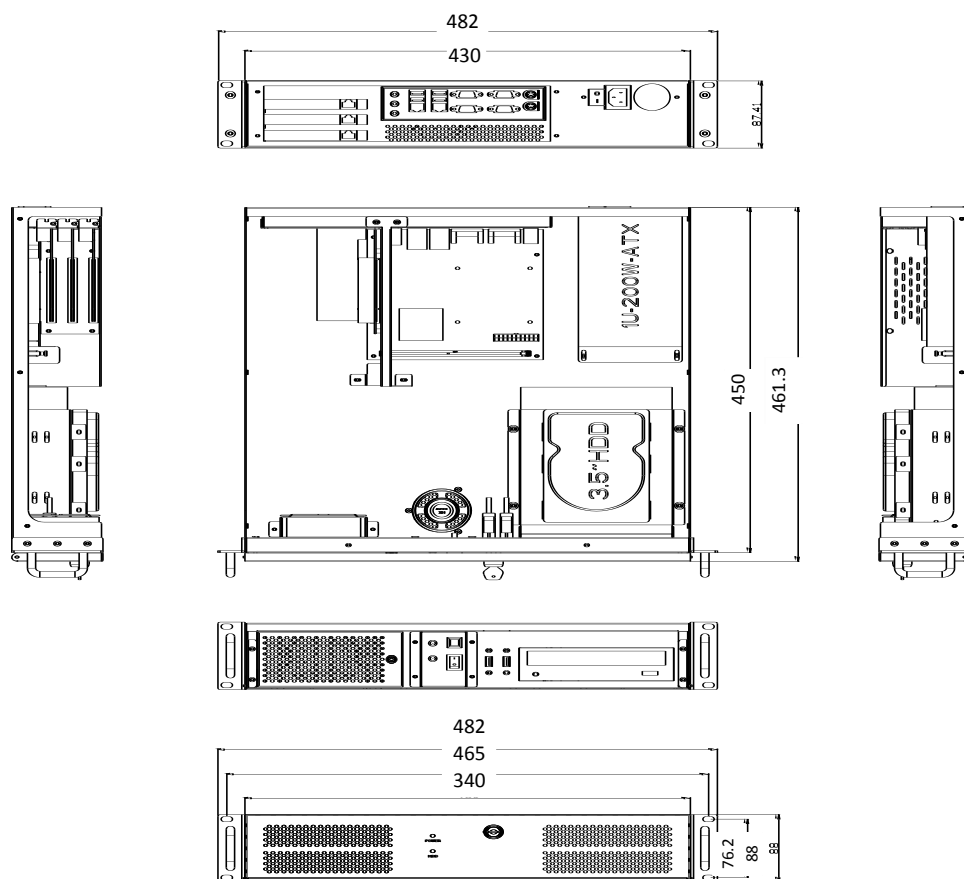

I/O View

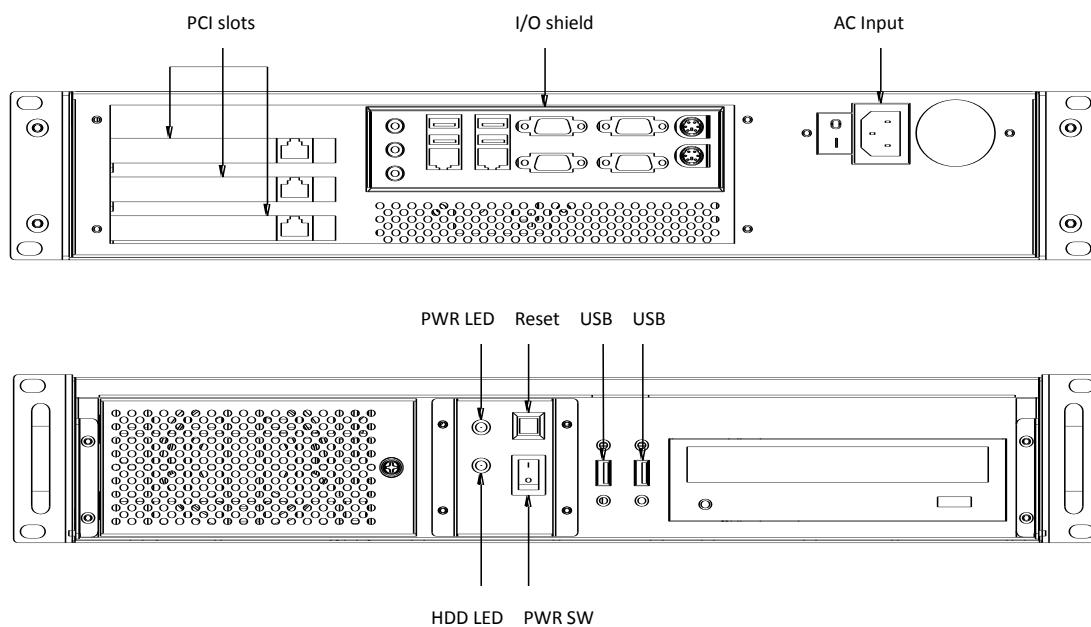

Ordering Information

P/N	Model	Description
116122120	GT6122TB-M	2 U Rackmount industrial Chassis