

Features

Intel Bay Trail-D J1900 Fanless Box PC with 2PCI


- Intel Bay Trail-D J1900 (2.0GHz, 10W) Processor
- Aluminum new mold, Hexagon screw fixation
- PCB modular design , shockproof hard disk rack optional
- mSATA opening on the bottom, easy disassembly
- Support 1 x DDR3L SO-DIMM DRAM , up to 8GB
- 1 x Mini-PCIe SATA disk , optional 2.5 " SATA2 hard disk
- Support 2 x PCI expansion Slots




Specifications

Processor	CPU	J1900 (Bay Trail-D)
	Frequency	2.0G/4C/4T
	TDP	10W
Memory	Frequency	1 x DDR3L 1600MHz
	Capacity	Optional , Up to 8GB
Storage	SATA	1 x 2.5" Hard Disk
	mSATA	1 x mSATA (Full-Size, Optional)
Display	Graphics	Intel HD Graphics
Front I/O	Button/LED Display	1 x Power Button(w/LED), 1 x HDD LED
	Serial	6 x COM(RS232)
	USB	2 x USB2.0
	GPIO	4-In, 4-Out
Rear I/O	Power In Connector	1 x DC 12V IN
	Display Port	1 x VGA ; 1 x HDMI
	Serial	2 x COM(RS232/422/485)
	LAN	2 x Gigabit LAN
	USB	3 x USB2.0 ; 1 x USB3.0
	PS/2 KB/MS	1 x KB/MS
	Audio	1 x Line-Out/MIC
Power Adaptor	Power Input	AC 100~240V/1.5A 50/60Hz
	Power Output	DC 12V/5A
Expansion	Mini PCIe	1 x Mini PCIe (Half-Size)
	PCI	2 x PCI Slot
Dimensions	W:299mm D:220mm H:95.8mm	
Environment	Operating Temp & Humidity	-10~70°C/10~90%, Non-Condensing
	Storage Temp & Humidity	-20~80°C/10~90%, Non-Condensing
Certification	EMC	CE / FCC

■ Dimensions

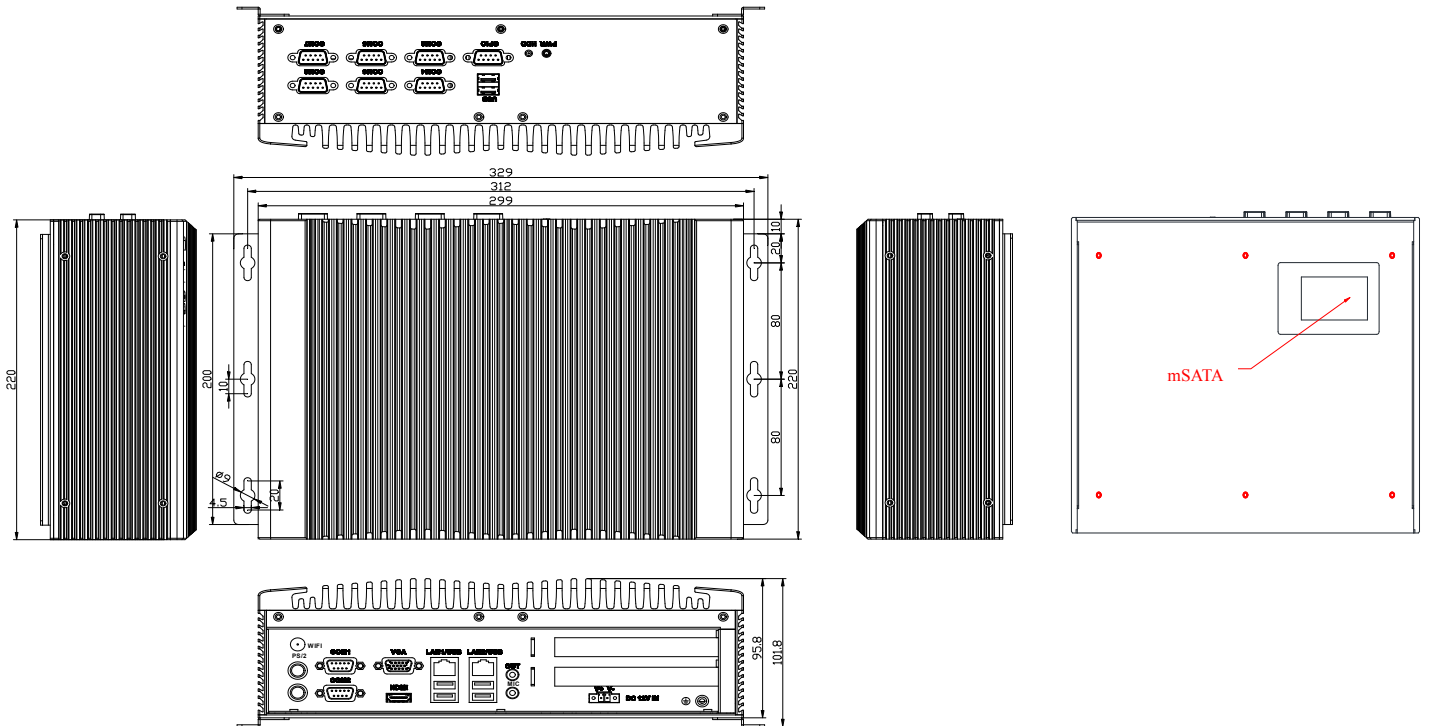

■ I/O View

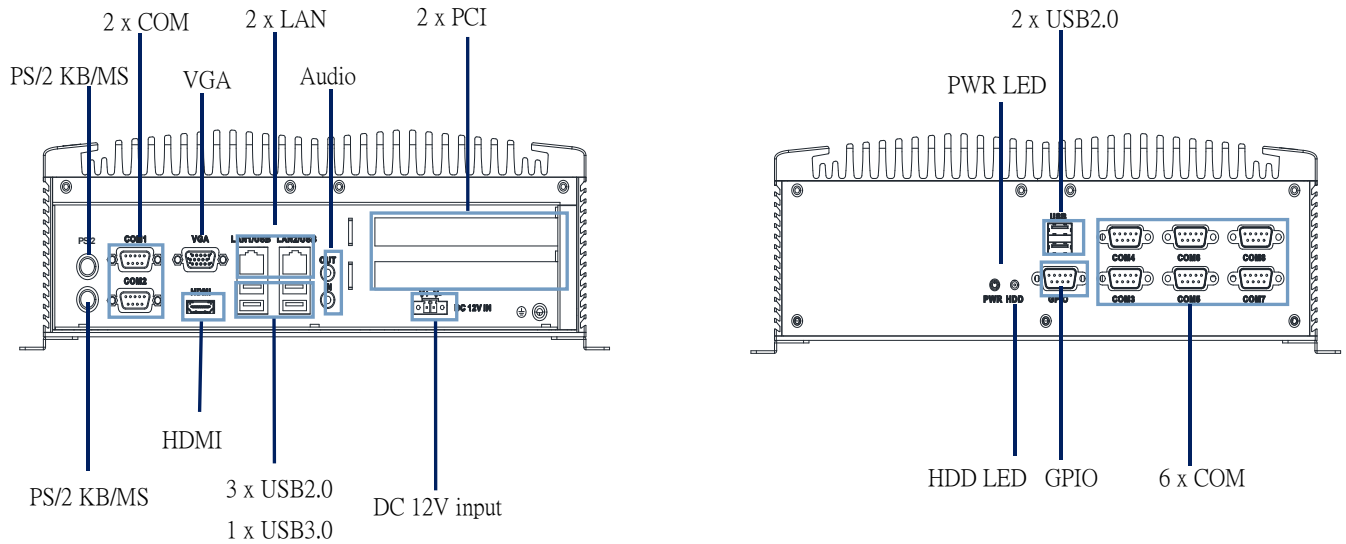

■ Ordering Information

P/N	Model	Description
186377002	UFO6377H-BT	Intel Bay Trail-D Embedded fanless System , w/60W DC Adaptor /8COM/VGA/HDMI/2LAN/GPIO/5USB2.0/USB3.0/AUDIO/2PCI
976377003	2.5 inch Anti-seismic hard drive frame	w/4 x Shockproof silicone ring/4 x M3*11 Screw /SATA Power cable/SATA data Cable