

## Features


- High efficiency 15" fanless Panel PC
- Front panel: IP65
- 2.5" Shockproof hard disk rack, supports mSATA Disk(optional)
- Double WIFI positions , expanded by mini PCIe wireless module
- Inside 1x USB2.0 for watchdog
- Supports EXT , SW and LED can connect to cabinet panel
- DC 9~28V wide voltage supply
- Supports VESA and Wallmount
- Supports Embedded operating system
- Supports flexible customization services




## Specifications

Processor	CPU	i5-7200u ( onboard )
	Frequency	Base Frequency 2.5G/Max turbo frequency 3.1G/2C/4T
	Power consumption	15W
Memory	Technology/Capacity	1 x DDR3L 1600MHz; optional, up to 8GB
Storage	SATA	1 x 2.5" Hard Disk (anti-seismic hard disk rack)
	mSATA	1 x mSATA (Full-size , optional)
Display	Display	Intel HD Graphics
Screen	LCD Size/Display Type	15" XGA LCD
	Resolution	1024×768
	Display Color	16.7M
	Viewing Angle	85/85/85/85 ( left/right/up/down )
	Luminance	350cd/m <sup>2</sup>
	Contrast Ratio	1500 : 1
	Touch Type	Five-wire resistive touch screen (Taiwan brand)
Rear I/O	Power Input	1 x DC 9~28V IN
	POWER SW	1 x POWER SW; 1 x EXT (SW and LED can connect to cabinet panel)
	Power Input	1 x VGA ; 1 x HDMI
	COM Ports	4 x COM (COM1/COM2 support RS232/422/485); optional 6 x COM ( COM4/5/6 are 3 in 1 )
	LAN Ports	2 x Gigabit LAN
	USB Ports	2 x USB3.0 ; 2 x USB2.0 ; ( Inside 1 x USB 2.0 for watchdog )
	WIFI	2 x WIFI (optional) , expanded by mini PCIe wireless module
Adapter 60W	Input	AC 100~240V/1.5A 50/60Hz
	Output	DC 12V/5A
Expansion	Mini PCIe	1 x Mini PCIe (Full-size)
Dimensions	W:387mm D:296mm H:72mm	
Environment	Operation Temp & Humidity	-10~60℃/10~90%, Non-condensing
	Storage Temp & Humidity	-20~70℃/10~90%, Non-condensing

## Dimensions

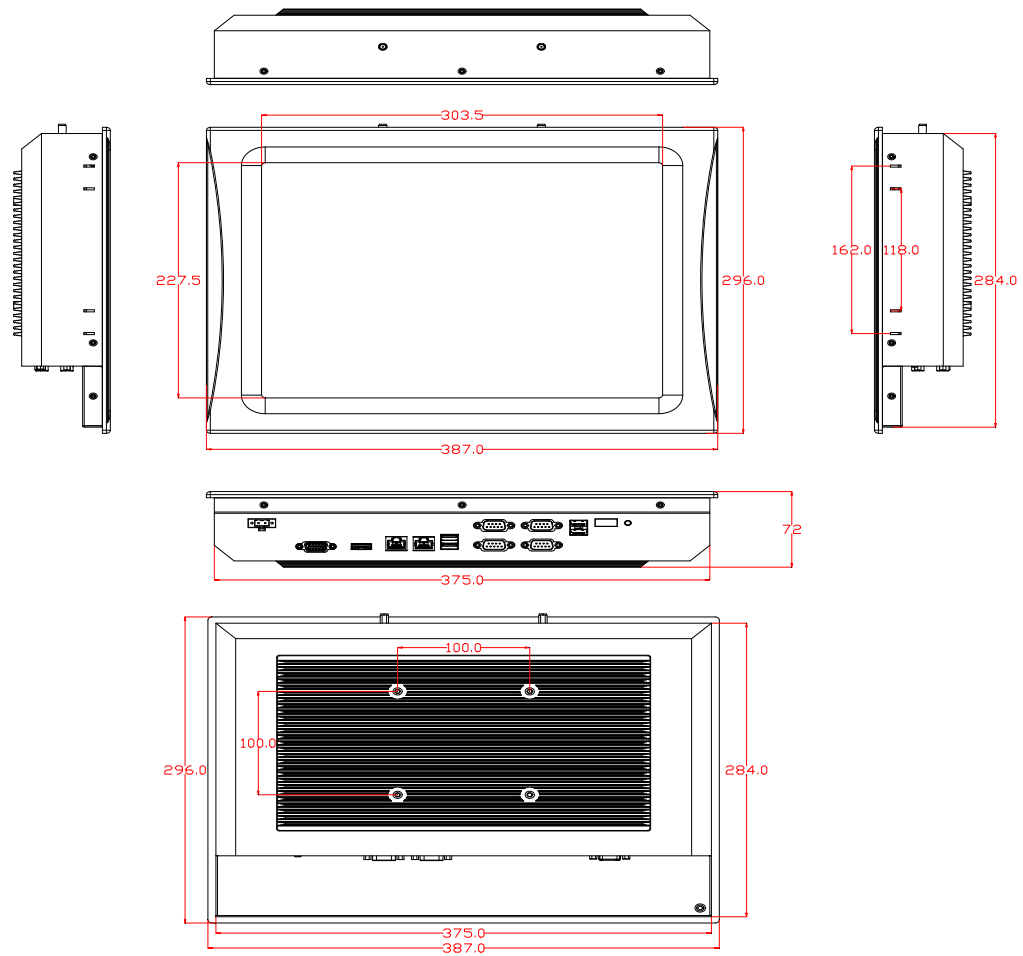

## I/O Appearance

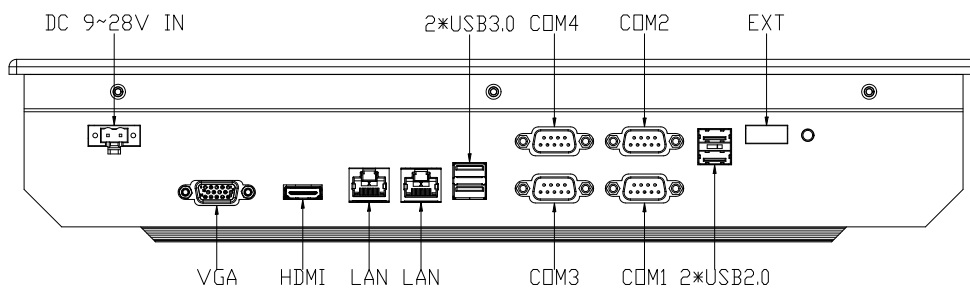

## Ordering Information

Part No.	Model	Description
226315051	PAD6315-i54C	w/i5-7200U/4COM/2LAN/4USB/DC9~28V/1024*768/Resistive touch screen/DC Adapter
226315052	PAD6315-i56C	w/i5-7200U/6COM/2LAN/4USB/DC9~28V/1024*768/Resistive touch screen/DC Adapter
226315053	PAD6315-i54C-T	w/i5-7200U/4COM/2LAN/4USB/DC9~28V/1024*768/Resistive touch screen/DC Adapter, front panel with SW & USB
226315054	PAD6315-i56C-T	w/i5-7200U/6COM/2LAN/4USB/DC9~28V/1024*768/Resistive touch screen/DC Adapter, front panel with SW & USB