

■ Features


- Low power consumption Fanless Embedded PC
- Onboard Intel J6412 CPU (2.0GHz · 10W)
- Rich I/O: 6COM/2LAN/8USB/HDMI/VGA/GPIO/EXT
- Aluminum new mold · Hexagon screw fixation
- PCB modular design · shockproof hard disk rack




■ Specifications

Processor	CPU	J6412 (Elkhart Lake)
	Frequency	2.0G/4C/4T
	TDP	10W
Memory	Frequency	1 x DDR4 2133/2400MHz
	Capacity	Optional , Up to 32GB
Storage	SATA	1 x 2.5' Hard Disk
	mSATA	1 x mSATA
Display	Graphics	Intel UHD Graphics for 10th Gen Intel Processors
Front I/O	Button/LED	1 x Power switch(w/LED)
	Serial	2 x COM
	USB	5 x USB2.0
	GPIO	4 IN & 4 OUT
	EXT	1 x EXT
Rear I/O	Power In Connector	1 x DC 12V IN
	Display Port	1 x VGA ; 1 x HDMI
	Serial	4 x COM(COM2 for RS232/485)
	LAN	2 x Gigabit LAN (RTL8111H)
	USB	2 x USB3.0
	Audio	1 x Line-Out & MIC-in
Power Adaptor	Power Input	AC 100~240V/1.5A 50/60Hz
	Power Output	DC 12V/5A
Expansion	Mini PCIe	1 x Mini PCIe (PCIe signal, Full-size)
Dimensions	W:200mm D:205mm H:77mm	
Environment	Operating Temp & Humidity	-10~70°C/10~90%, Non-Condensing
	Storage Temp & Humidity	-20~80°C/10~90%, Non-Condensing

■ Dimensions

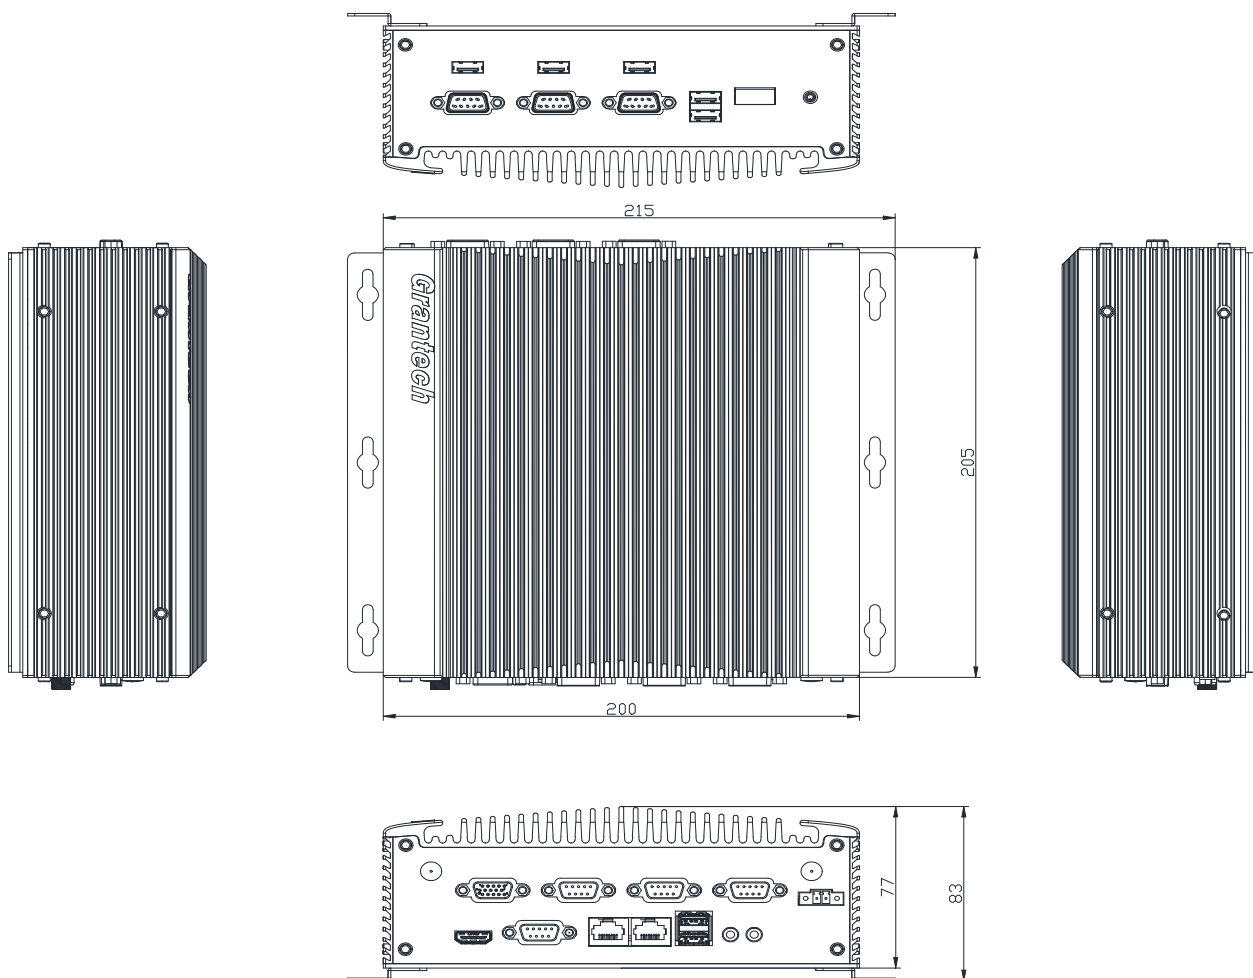

■ I/O View

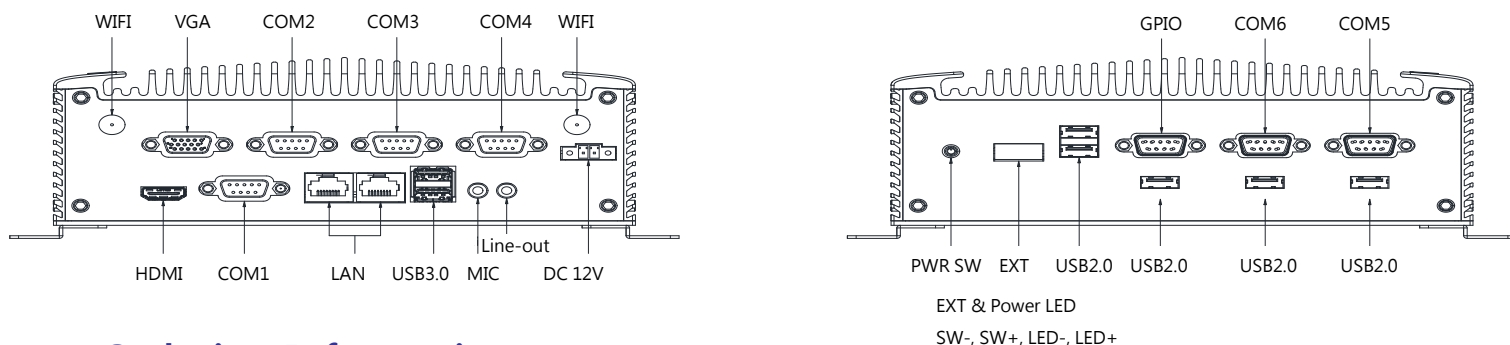

■ Ordering Information

P/N	Model	Description
186366010	UFO6366H-6412C	J6412 Embedded fanless System · w/60W Adaptor/6COM/HDMI/VGA/2LAN/GPIO/8USB/EXT